




**Model RSV**  
**Spun Aluminum Ventilator**

**Features:**

- Compatible With Spun Dome Power Roof Ventilators.
- Gravity Relief-Intake Applications.
- Designed For Minimum Resistance To Airflow.
- Shroud is Constructed of Heavy Gauge Aluminum With A Beaded Edge For Maximum Strength.
- Aluminum Birdscreen.
- Covers Are Easily Detachable For Access To Interior.
- Corrosion Resistant Design:

All aluminum materials assembled with stainless steel fasteners ensure superior corrosion resistance and long life.

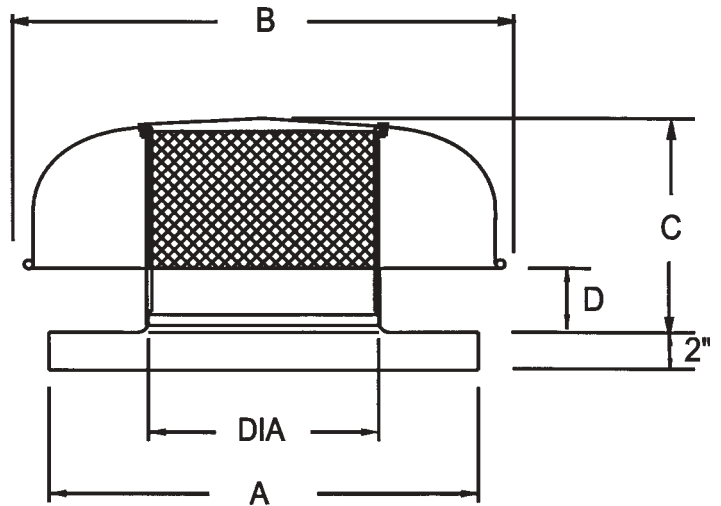

**ROMLA VENTILATOR CO.**  
**9668 Heinrich Hertz Drive • Unit D**  
**San Diego, California 92154**  
**Ph (619) 946-1224 Fax (619) 946-1227**

**Available Options:**

- CF8 -Type CF roof curb 8" high
- SF8 -Type SF roof curb 8" high
- IBD -Intake backdraft damper (downflow)
- RBD -Relief backdraft damper (upflow)
- IBD-M -Intake motorized damper 115v
- RBD-M -Relief motorized damper 115v
- EC -Epoxy coating

MODEL	A	B	C	D	DIA	NET WT
RSV-8	18.5	19.25	8	3	8.5	14
RSV-10	18.5	21.50	8.75	3.5	10.5	15
RSV-12	20.5	26	10.375	3.75	12.5	19
RSV-14	24.75	27.5	11.25	4.25	14.5	21
RSV-16	24.75	29.5	11.25	4.25	16.5	23
RSV-18	28.375	33.5	11.50	4.50	18.5	26
RSV-20	28.375	36.5	11.75	4.75	20.5	27
RSV-24	33.50	39.5	12.50	5.50	24.5	30
RSV-30	36.50	48	15.25	6.25	30.5	44
RSV-36	44.50	56	15.25	6.25	36.5	48

**SPECIFICATIONS**

MARK	QTY	MODEL	ACCESSORIES	SHROUD MATERIAL	CURB MATERIAL

<b>PROJECT:</b> <b>LOCATION:</b> <b>SUBMITTED BY:</b> <b>DATE:</b>	<b>CONTRACTOR:</b> <b>ENGINEER:</b> <b>APPROVED BY:</b> <b>DATE:</b>
---	---

