



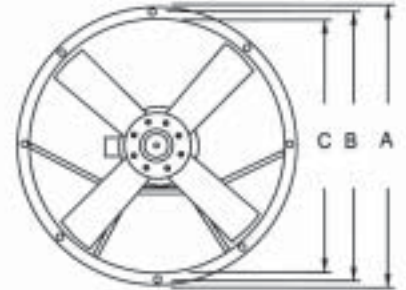

Model TD
Direct Drive Tubeaxial Fan

- Cast aluminum non-sparking airfoil propeller. These propellers are easily removed with the use of taper lock bushings.
- Heavy gauge all welded housing with steel angle end flange rings for superior strength. Rings contain mounting holes for securing fan to ducting.
- Industrial duty totally enclosed fan cooled (TEFC) or explosion proof ball bearing motors for years of trouble free operation.
- Tested and rated in accordance with AMCA standard 211.

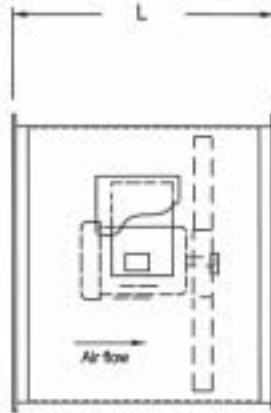

ROMLA VENTILATOR CO.
9668 Heinrich Hertz Drive • Unit D
San Diego, California 92154
Ph (619) 946-1224 Fax (619) 946-1227

Abbreviation for Accessories

- OMR** -Optional mouting arrangement
-
- AD** -Access door
IG -Inlet guard
OG -Outlet guard
CF -Companion flanges
SC -Special coating
VI -Vibration isolators
MB -Mounting brackets

DIMENSIONS							
SIZE	A	B	C	L	H	GA	APPROX WT
24	27-3/16	25-7/8	24	22	7/16	12	165
30	34-3/16	32-3/8	30	24	7/16	12	200
36	40-3/16	38-3/8	36	26	7/16	12	270
42	46-3/16	44-3/8	42	32	7/16	10	450
48	52-3/16	50-3/8	48	36	7/16	10	675

SPECIFICATIONS

MARK	MODEL	NO REQ'D	HP	SP	FAN RPM	VOLTS	HZ	TYPE	CFM	ACCESSORIES

<p>PROJECT: LOCATION: SUBMITTED BY: DATE:</p>	<p>CONTRACTOR: ENGINEER: APPROVED BY: DATE:</p>
--	--