




**Model RR  
Turbo Ventilator**

- Heavy Duty Ball Bearings on Sizes 16 thru 48.
- Self-Lubricating Nylon Bearings on Sizes 6 thru 14.
- Double Cap Assures Extra Strength.
- Locked On Rotor Mechanism Prevents Loss or Damage in High Winds.
- Corrugated Vanes Provide More Strength and Stability.
- Lower Bearings Are Oil Impregnated Sintered-Type Wich Assures Quiet Operation.
- Sealed Bearing Housing Excludes Dust, Grit, and Foreign Matter and Retains Lubrication.
- Mill Finish Zinc-Aluminum Construction On Sizes 6-24. Grey Polyurethane Coating Over G90, Galvanized Material On Sizes 30-48

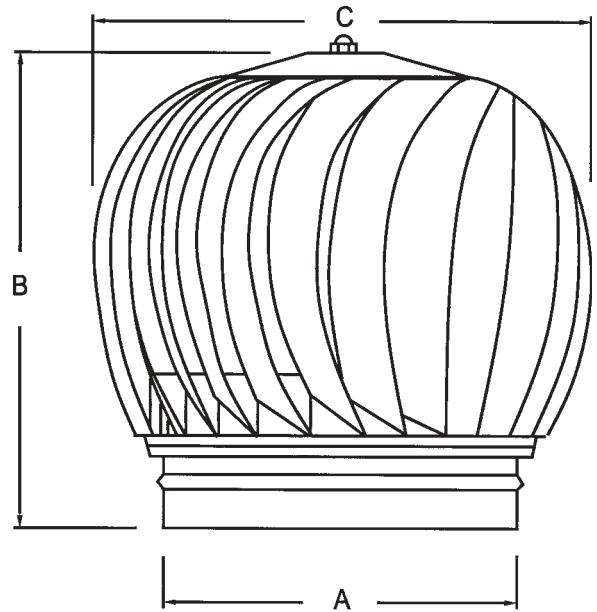

**ROMLA VENTILATOR CO.**  
 9668 Heinrich Hertz Drive • Unit D  
 San Diego, CA 92154  
 Ph: (619) 946-1224 Fax: (619) 946-1227

**Options & Accessories**

- B -Model B base
- C -Model C flat collar base
- DD -Unit disc damper
- BS - Birdscreen
- ISC -Insect screen
- ADE -Air dry enamel

DIMENSION - GAUGES					
MODEL	A	B	C	GAUGES	
				Galv.	SS
RR-6	6	11-3/4	10	26	26
RR-8	8	13	12-1/2	26	26
RR-10	10	14-1/2	14-1/2	26	26
RR-12	12	15-1/2	16-3/8	24	24
RR-14	14	17-1/2	18-5/8	24	24
RR-16	16	20-1/4	21-3/4	24	24
RR-18	18	22-1/2	23-3/4	24	24
RR-20	20	24-5/8	26-3/8	24	24
RR-24	24	29	32	24	24
RR-30	30	39	39	22	22
RR-36	36	37	46	22	22
RR-42	42	46	52	20	20
RR-48	48	50	60	20	20

QTY	MODEL	EXHAUST CFM	WIND SPEED	STACK HEIGHT	TEMP. DIFF.	MATERIAL		ACCESSORIES	MARK
						ZINC ALUM	SS		

<p><b>PROJECT:</b>  <b>LOCATION:</b>  <b>SUBMITTED BY:</b>  <b>DATE:</b></p>	<p><b>CONTRACTOR:</b>  <b>ENGINEER:</b>  <b>APPROVED BY:</b>  <b>DATE:</b></p>
--	--