



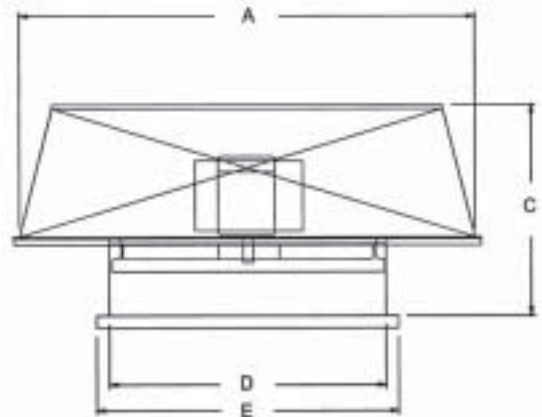

Model H Hooded Power Ventilator

- Direct drive power roof ventilator-specify exhaust or supply application
- Cast aluminum non-sparking airfoil propeller
- Heavy duty all welded drive frame provides a rigid platform for motor and propeller.
- Variable pitch drives to 7-1/2 Hp
- Industrial duty ball bearing motors.
- Self-aligning pillow block bearings
- Galvanized hood and all welded base assembly with protective urethane finish
- Hinged hood for easy access to motor and drives
- 1/2 mesh galvanized birdscreen
- Tested and rated in accordance with AMCA Standard 211

ROMLA VENTILATOR CO.
9668 Heinrich Hertz Drive • Unit D
San Diego, California 92154
Ph (619) 946-1224 Fax (619) 946-1227

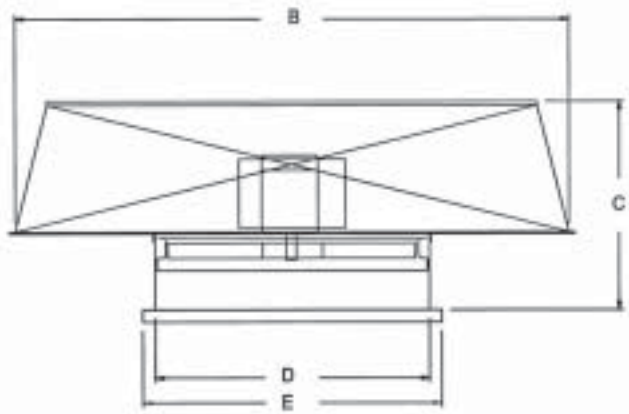

Abbreviation for Accessories

- DS -Safety disconnect switch
 CF8 -Type CF roof curb 8" high
 SF8 -Type SF roof curb 8" high
 CF12 -Type CF roof curb 12" high
 SF12 -Type SF roof curb 12" high
 611 -Automatic exhaust damper
 611M -Motorized exhaust damper 1/115v
 613 -Automatic supply damper
 VC-1 -Motorized supply damper 1/115v
 EC -Epoxy coating

FAN SIZE	A	B	C	D	E	BASE GAUGE	HOOD GAUGE	WT
24	51	51	24	30.25	36	16	20	196
30	60	60	24	36.25	42	16	20	260
36	71	71	28	42.25	48	16	20	375
42	81	81	30	48.25	54	16	20	500
48	91	91	31	54.25	60	14	20	650
54	99	99	34	60.25	66	14	18	775
60	99	120	35	66.25	72	14	18	900

SPECIFICATIONS

QTY	MODEL NO.	TAG	CFM	SP	RPM	HP	VOLTS	PH	HZ	TYPE	APPLIC	OPTION

PROJECT: LOCATION: SUBMITTED BY: DATE:	CONTRACTOR: ENGINEER: APPROVED BY: DATE:
---	---