


MODEL RR SUBMITTAL

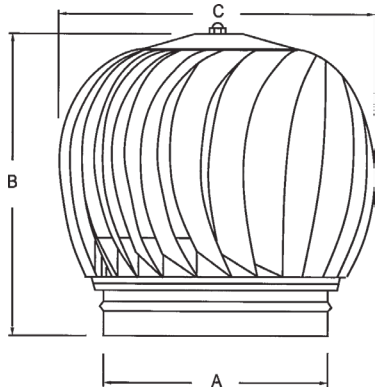

Project Number:

Project Name:

Customer:

Date:

PRODUCT INFORMATION

Submitted By:

Approved By:

Date:

QTY	MODEL	EXHAUST CFM	WIND SPEED	STACK HEIGHT	TEMP. DIFF.	MATERIAL		ACCESSORIES	MARK
						ZINC-ALUM	SS		

STANDARD FEATURES

- **Locked On Rotor Mechanism:** Prevents loss or damage in high winds.
- **Extra Strength and Stability:** Double cap with corrugated vanes.
- **Quiet Rotating Operation:** Lower bearings are oil impregnated sintered type assures quiet operation.
- **Sealed Bearing Housing:** Excludes dust, grit, and foreign matter and retains lubrication.
- **Sleek Durable Construction:**
 - Sizes 6-24, zinc-aluminum with grey polyurethane coating
 - Sizes 30-48, G90 Galvanized Material
- **Ball Bearings**
 - Sizes 6 - 14, Self-Lubricating Nylon Bearings
 - Sizes 16 - 48, Heavy Duty Ball Bearings

MODEL	DIMENSIONS (INCHES)			GALV GAUGE	SS GAUGE
	A	B	C		
RR-6	6	11-3/4	10	26	26
RR-8	8	13	12-1/2	24	24
RR-10	10	14-1/2	14-1/2	24	24
RR-12	12	15-1/2	16-3/8	24	24
RR-14	14	17-1/2	18-5/8	24	24
RR-16	16	20-1/4	21-3/4	24	26
RR-18	18	22-1/2	23-3/4	24	24

MODEL	DIMENSIONS (INCHES)			GALV GAUGE	SS GAUGE
	A	B	C		
RR-20	20	24-5/8	26-3/8	24	24
RR-24	24	29	32	24	24
RR-30	30	39	39	22	22
RR-36	36	37	46	22	22
RR-42	42	46	52	20	20
RR-48	48	50	60	20	20

ADDITIONAL OPTIONS

- Curved base
- Flat collar base
- Unit disc damper
- Bird Screen & Insect screen
- Air dry enamel

NOTE: Romla Fans is committed to product improvement and retains the right to change specifications and dimensions at will without prior notification.