



Model RSV

SPUN GRAVITY VENT


Model RSV spun aluminum vents are suited for intake or relief applications. This low-silhouette roof mounted unit provides gravity ventilation and minimizes airflow resistance.

PRODUCT BENEFITS

- Utilized for exhaust relief or air
- Aerodynamics for minimal airflow resistance.
- Attractive, low silhouette design
- Durable, heavy gauge aluminum shroud with beaded edge for maximum strength.
- Aluminum body with stainless steel fasteners ensure long life.
- Cover easily detaches for interior maintenance access.

HOW IT WORKS

Hot air exhausts via gravity ventilation, while the “mushroom cap” lid prevents rain entry.

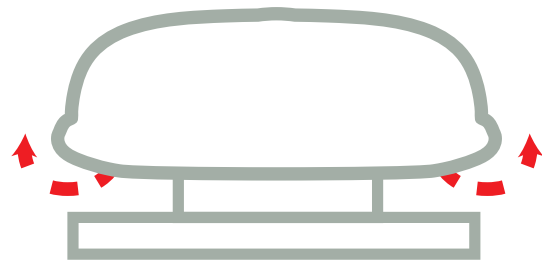

Hot air exhausts through natural ventilator.

PRODUCT RANGE

Throat Diam.	Base Length	Hood Length	Intake Area	Height	Weight
8.5" - 36.5"	18.5" - 44.5"	19.25" - 56"	1.6 ft ² - 10.34 ft ²	8" - 15.25"	14 lbs - 48 lbs

STANDARD FEATURES

- Aluminum construction, with stainless steel fasteners.
- Aluminum bird screen.
- Corrosion resistant material ensures superior protection and longer life
- Easily detachable cover for access to interior

OPTIONAL FEATURES

- Inlet & outlet guards
- Disconnect switches:
 - NEMA 3R rainproof
 - NEMA 4 watertight
- Extended height roof curbs
 - Self-flashing
 - Roofed over
- Special coatings
- Fusible link damper lifter
- Dampers w/ 115-volt actuators
- Magnetic damper latches



Scan the QR code for additional product information.
 ©2025 Romla Fans. All rights reserved. Vol.1|3/25